

# H2O-US3-S

## Standard Undersink Filter with Sediment Prefilter




*Cleaning your water without crowding the counter*



- Sealed construction unit with 25,000 gallon capacity
- KDF® / GAC Filter Media
- 6-stage filtration and purification system
- Sediment prefilter cartridge removes sediments with hypoallergenic multi-micron filtration
- Installed under the sink, out of sight
- Connects to separate, chromed, long-reach faucet
- Includes easy-installation kit
- Quick connect fittings for simple installation / replacement
- Available inline for direct connection to faucet
- Bacteriostatic media: prevents bacteria growth (algae, fungi)
- Improves taste and color, eliminates odors
- Reduces most EPA listed contaminants
- Includes prorated warranty

Installation kit includes 6 feet of tubing (1/4" outside diameter), saddle valve, long-reach faucet, fittings and adapters.

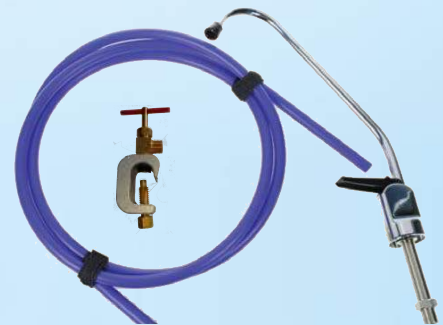

Housing bracket included



|                      |   |
|----------------------|---|
| Max Capacity         | 25,000 gallons (94,635 liters)          |
| Recommended Flow     | 1.0 gpm (3.79 lpm)                      |
| Unit Height          | 16.5" (41.9 cm)                         |
| Unit Width           | 9.5" diameter (24.1 cm)                 |
| Unit Box Dimensions  | 18" x 12" x 7" (45.7 x 30.5 x 17.8 cm)  |
| Unit Shipping Weight | 9.9 lbs (4.5 kg)                        |
| Packing              | 2 per master case                       |
| Master Dimensions    | 23" x 19" x 14" (58.4 x 48.3 x 35.6 cm) |
| Master Case Weight   | 21.6 lbs (9.8 kg)                       |

H<sub>2</sub>O International Inc.  
3001 SW 15<sup>th</sup> St. - Suite C  
Deerfield Beach, FL 33442  
1 800 570-3464 USA Toll Free  
1 954 570-3464 International  
info@h2ofilter.com  
www.h2ofilter.com

